


#15 Phillips Head DEKFAST™ DF-#15-PH3

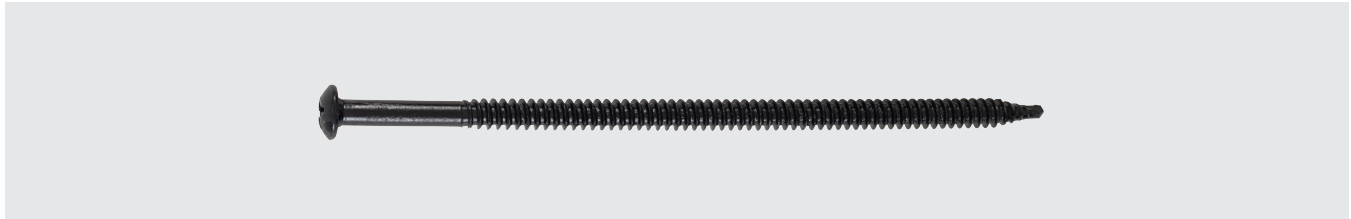

Features and Benefits

- Extra stable #3 Phillips drive
- Drill point design prevents fastener walking
- 13 threads per inch provides higher pull-out values
- Drill point cuts through gravel and BUR
- Cathodic epoxy e-coat

Application


Insulation and membrane attachment to steel, wood and structural concrete decks

Product Selection

Material No.	Fastener Length	Thread* Length	Description	Carton Wt. (lbs.)	Carton Qty.
1204935	2"	1.75"	DF-#15x2-PH3-E0999-B	24	1,000
789609	3"	2.75"	DF-#15x3-PH3-E0999-B	30	1,000
789635	4"	3.75"	DF-#15x4-PH3-E0999-B	42	1,000
789664	5"	4"	DF-#15x5-PH3-E0999-B	51	1,000
789692	6"	4"	DF-#15x6-PH3-E0999-B	30	500
1230686	7"	4"	DF-#15x7-PH3-E0999-B	35	500
789740	8"	4"	DF-#15x8-PH3-E0999-B	40	500
1297437	9"	4"	DF-#15x9-PH3-E0999-B	45	500
789767	10"	4"	DF-#15x10-PH3-E0999-B	49	500
789791	12"	4"	DF-#15x12-PH3-E0999-B	29	250
789807	14"	4"	DF-#15x14-PH3-E0999-B	34	250
789822	16"	4"	DF-#15x16-PH3-E0999-B	38	250

*Note – Thread length measured from tip of the drill point to end of the threads.

#15 Phillips Head DEKFAST™ DF-#15-PH3

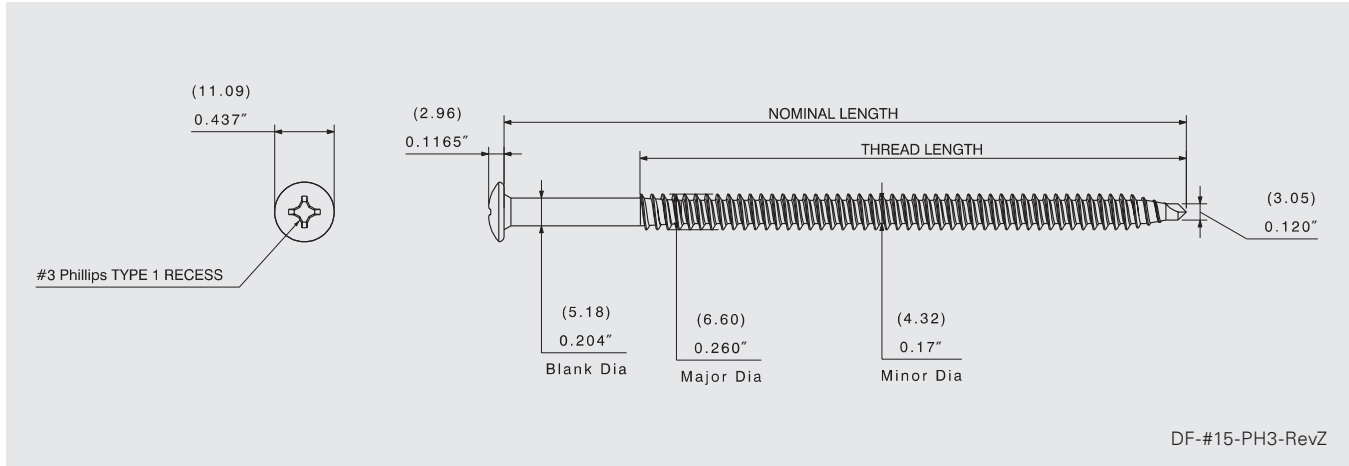

Coating and Corrosion

15/15 Kesternich per FM 4470
800 hour salt spray per ASTM B117
Cathodic epoxy e-coat

Approvals



State of Florida: FL20311

16-0712.08

Performance Data^{1,2}

Material Strength

Tensile	4350 lbf / 19350 N
Shear	3700 lbf / 16458 N
Torsional	130 lbf-in / 14.69 N-m

Pull Out Strength Steel

18 Ga (1.2 mm):	1140 lbf / 50171 N
20 Ga (0.9 mm):	898 lbf / 3995 N
22 Ga (0.8 mm):	683 lbf / 3038 N
24 Ga³ (0.6 mm):	453 lbf / 2015 N
26 Ga³ (0.5 mm):	301 lbf / 1339 N

¹ SFS-SC12250.10.17

² SFS 5509.18

Pull Out Strength Wood

2x dimensional lumber (1" penetration) (25.4 mm):	692 lbf / 3078 N
3/4" (19.1 mm) FR Plywood (through penetration):	703 lbf / 3127 N

Pull Out Strength Concrete

4000 psi (1" penetration) (25.4 mm):	728 lbf / 3228 N
---	------------------

Installation and Application Considerations

Tools: 2000–2500 rpm screw guns with hardened #3 Phillips bit. For structural concrete, 7/32" carbide bit and 1500 rpm screw gun or hammer drill in hammer mode. Structural concrete to be predrilled with standard 7/32" carbide bit to minimum 1/2" deeper than fastener penetration. The standard carton package includes one #3 Phillips bit.

Material:

- Steel thickness from 26 ga (0.019 in.) through 18 ga (0.048 in.); Min penetration: 3/4"
- Wood 2x (1–1/2" thick): Min penetration: 1"
- Plywood and OSB: Min through penetration: 3/4"
- Structural Concrete: Min penetration: 1"

Metric values are approximate conversions.

The details stated are results of tests and/or calculations and therefore are non-binding and do not represent warranties or warranted characteristics for not specified applications. All calculations therefore have to be checked and approved by the responsible planner ahead of execution. The user is responsible to assure compliance with all applicable laws and regulations.

US

T 800 234 4533

www.sfsintecusa.com

Canada

T 866 847 5400

www.sfsintec.ca