


GD-IN(MF)-EX-C Quick Spec

GLUE DOWN MEMBRANE - INSULATION (MF) - EXISTING ROOF - CONCRETE DECK (RECOVER)

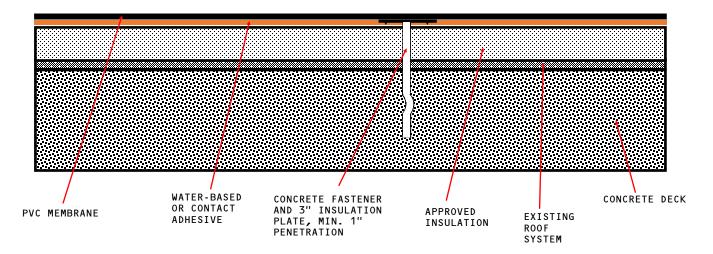

APPROVED INSULATION: UL CLASSIFIED POLYISOCYANURATE INSULATION.

NOTES:

- 1. Attach Insulation with Concrete Fasteners and 3" Steel Insulation Plate. Refer to Detail Drawings "Fastening Pattern Insulation/Coverboard GD-2 through GD-11". Minimum 1"
- 2. Existing Roof types may vary and not all are acceptable. Please contact the Phoenix Technical Department for approval on layover projects prior to installation.
- 3. Class A Fire Rating with unlimited slope when utilizing Approved Coverboards.