




**PHOENIX**  
PRODUCTS™

## GD-CB(MF)-EX-C Quick Spec

GLUE DOWN MEMBRANE - COVER BOARD (MF) - EXISTING ROOF - CONCRETE DECK (RECOVER)

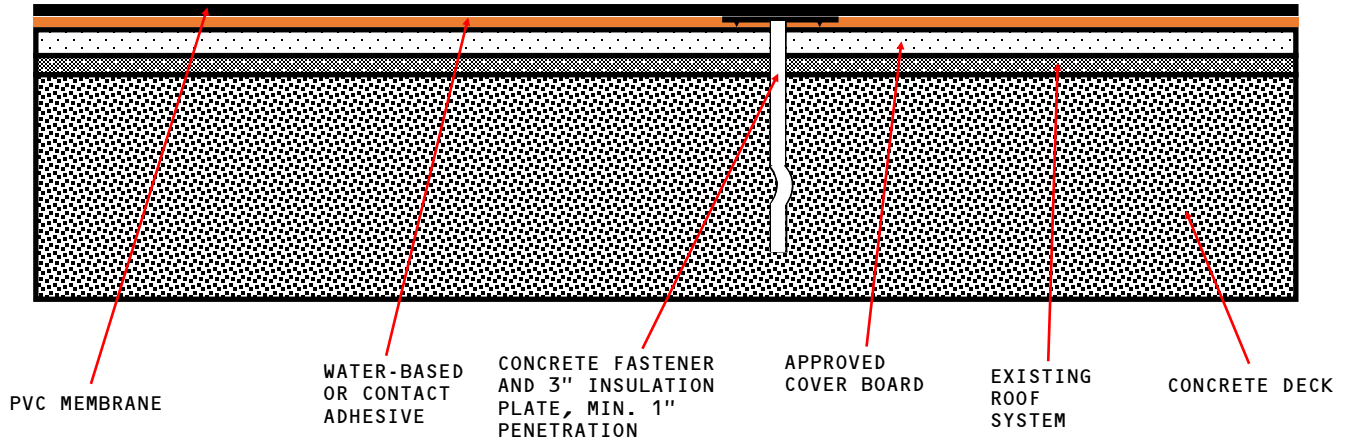

**APPROVED COVER BOARD:** DENS DECK, DENS DECK PRIME OR SECUROCK GLASS-MAT, MINIMUM 1/4" THICKNESS.

**NOTES:**

1. Attach Coverboard with Concrete Fasteners and 3" Steel Insulation Plate. Refer to Detail Drawings "Fastening Pattern Insulation/Coverboard GD-2 through GD-11". Minimum 1" penetration.
2. Existing Roof types may vary and not all are acceptable. Please contact the Phoenix Technical Department for approval on layover projects prior to installation.
3. Class A Fire Rating with unlimited slope when utilizing Approved Coverboards.