




PHOENIX
PRODUCTS™

GD-CB(MF)-IN(MF)-EX-C

Quick Spec

GLUE DOWN MEMBRANE - COVER BOARD (MF) - INSULATION (MF) - EXISTING ROOF - CONCRETE DECK (RECOVER)

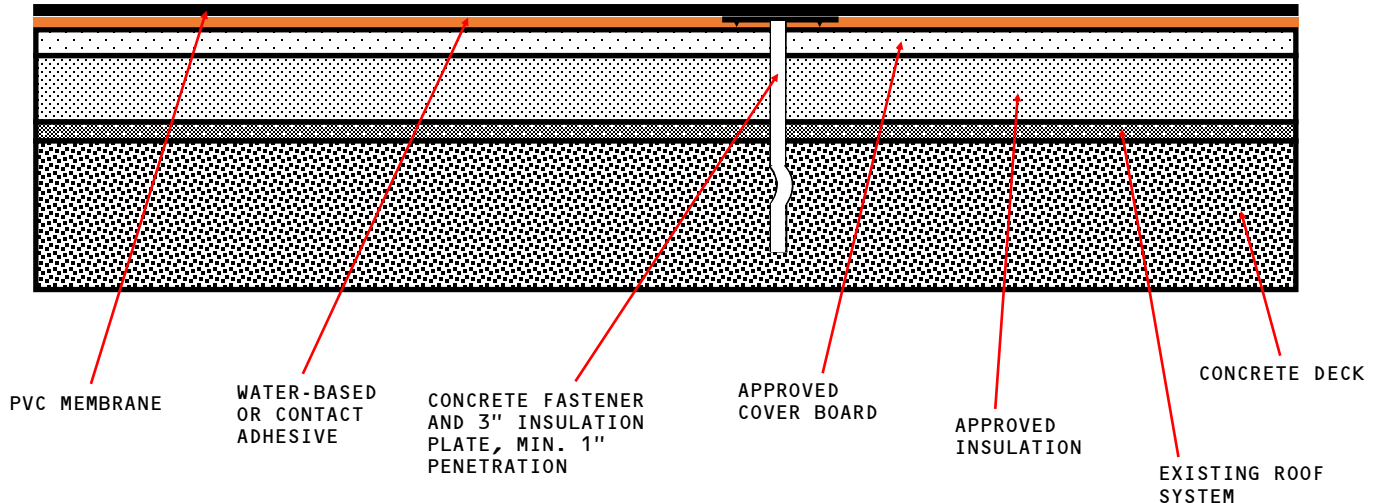

APPROVED COVER BOARD: DENS DECK, DENS DECK PRIME OR SECUROCK GLASS-MAT, MINIMUM 1/4" THICKNESS.

APPROVED INSULATION: UL CLASSIFIED POLYISOCYANURATE, EXPANDED POLYSTYRENE, EXTRUDED POLYSTYRENE INSULATION.

NOTES:

1. Attach Coverboard with Concrete Fasteners and 3" Steel Insulation Plate. Refer to Detail Drawings "Fastening Pattern Insulation/Coverboard GD-2 through GD-11". Minimum 1" penetration.
2. Existing Roof types may vary and not all are acceptable. Please contact the Phoenix Technical Department for approval on layover projects prior to installation.
3. Class A Fire Rating with unlimited slope when utilizing Approved Coverboards.