




**PHOENIX**  
PRODUCTS™

**GD-CB(MF)-IN(MF)-EX-W**

**Quick Spec**

GLUE DOWN MEMBRANE - COVER BOARD (MF) - INSULATION (MF) - EXISTING ROOF - WOOD DECK (RECOVER)

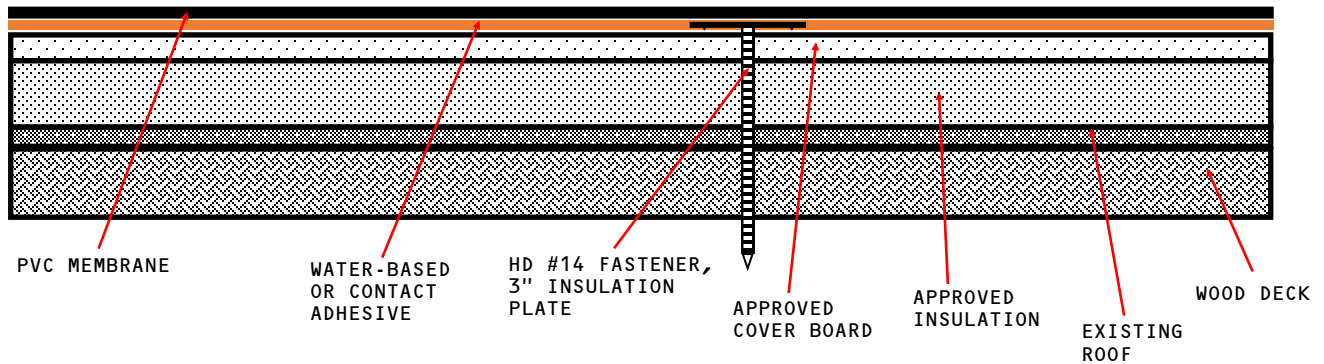

**APPROVED COVER BOARD:** DENS DECK, DENS DECK PRIME OR SECUROCK GLASS-MAT, MINIMUM 1/4" THICKNESS.

**APPROVED INSULATION:** UL CLASSIFIED POLYISOCYANURATE, EXPANDED POLYSTYRENE, EXTRUDED POLYSTYRENE INSULATION.

**NOTES:**

1. Attach Coverboard with #12 or #14 HD Fasteners and 3" Steel Insulation Plate. Refer to Detail Drawings "Fastening Pattern Insulation/Coverboard GD-2 through GD-11".
2. Existing Roof types may vary and not all are acceptable. Please contact the Phoenix Technical Department for approval on layover projects prior to installation.
3. Class A Fire Rating with unlimited slope when utilizing Approved Coverboards.