




**PHOENIX**  
PRODUCTS™

## GD-CB(MF)-IN(MF)-S RoofNav Assembly

GLUE DOWN MEMBRANE - COVER BOARD (MF) - INSULATION (MF) - STEEL DECK (NEW OR TEAR OFF)

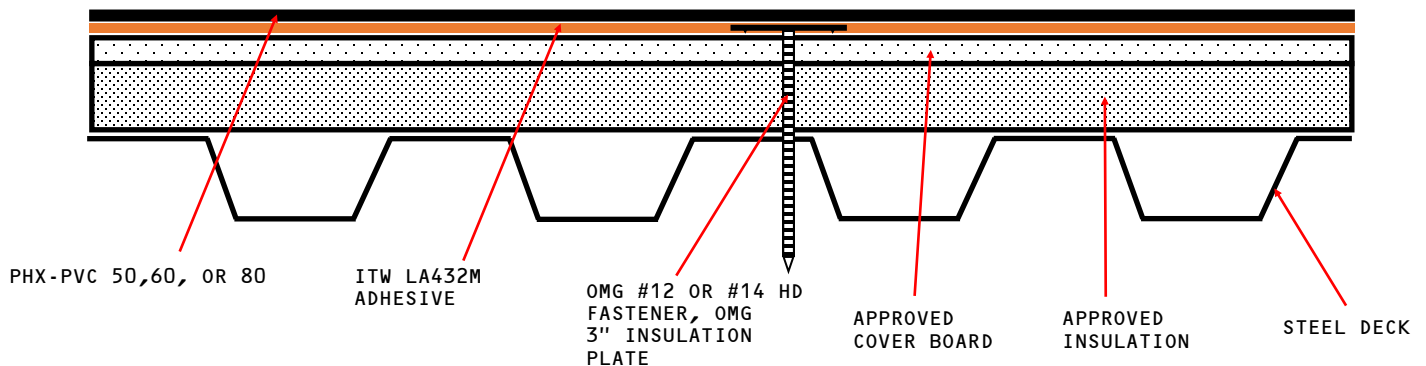

**APPROVED COVER BOARD:** DENS DECK OR DENS DECK PRIME, MINIMUM 1/4" THICKNESS.

**APPROVED INSULATION:** HUNTER PANELS, RMAX OR ATLAS UL CLASSIFIED INSULATION.

### RoofNav Assembly Properties:

Assembly #: 210463-0-0	Slope: 1.0000
Roof System: Single-Ply System	Wind Uplift*: 90
Application: New Roof	Internal Fire: 1
Cover Securement: Adhered	Exterior Fire: A
Deck Type: Steel	Hail: SH
Assembly limited to use with noncombustible walls only:	No

### NOTES:

1. Attach Coverboard with #12 or #14 HD Fasteners and 3" Steel Insulation Plate. Refer to Detail Drawings "Fastening Pattern Insulation/Coverboard GD-2 through GD-11".
2. Class A Fire Rating with unlimited slope when utilizing Approved Coverboards.