




PHOENIX
PRODUCTS™

GD-CB(MF)-IN(MF)-W Quick Spec

GLUE DOWN MEMBRANE - COVER BOARD (MF) - INSULATION (MF) - WOOD DECK (NEW OR TEAR OFF)

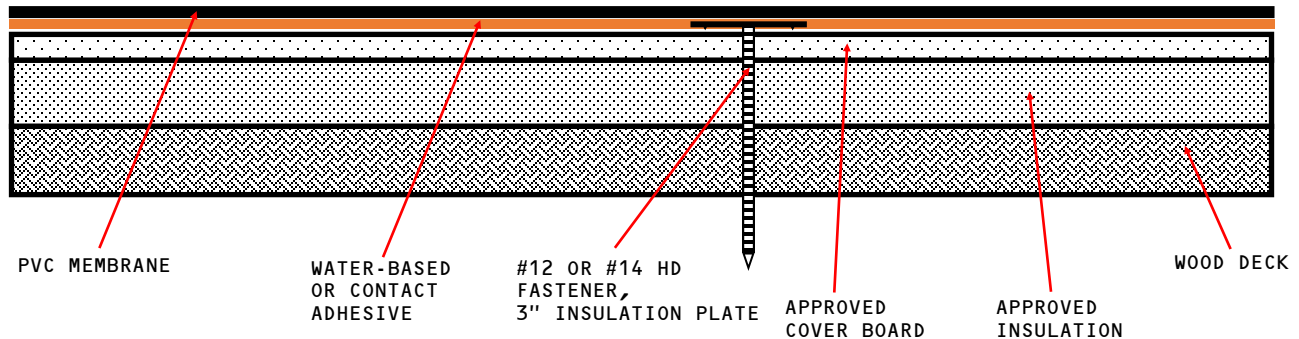

APPROVED COVER BOARD: DENS DECK, DENS DECK PRIME OR SECUROCK GLASS-MAT, MINIMUM 1/4" THICKNESS.

APPROVED INSULATION: UL CLASSIFIED POLYISOCYANURATE, EXPANDED POLYSTYRENE, EXTRUDED POLYSTYRENE INSULATION.

NOTES:

1. Attach Coverboard with #12 or #14 HD Fasteners and 3" Steel Insulation Plate. Refer to Detail Drawings "Fastening Pattern Insulation/Coverboard GD-2 through GD-11".
2. Class A Fire Rating with unlimited slope when utilizing Approved Coverboards.