




GLUE DOWN MEMBRANE - COVER BOARD (RB) - INSULATION (MF) - STEEL DECK (NEW OR TEAR OFF)

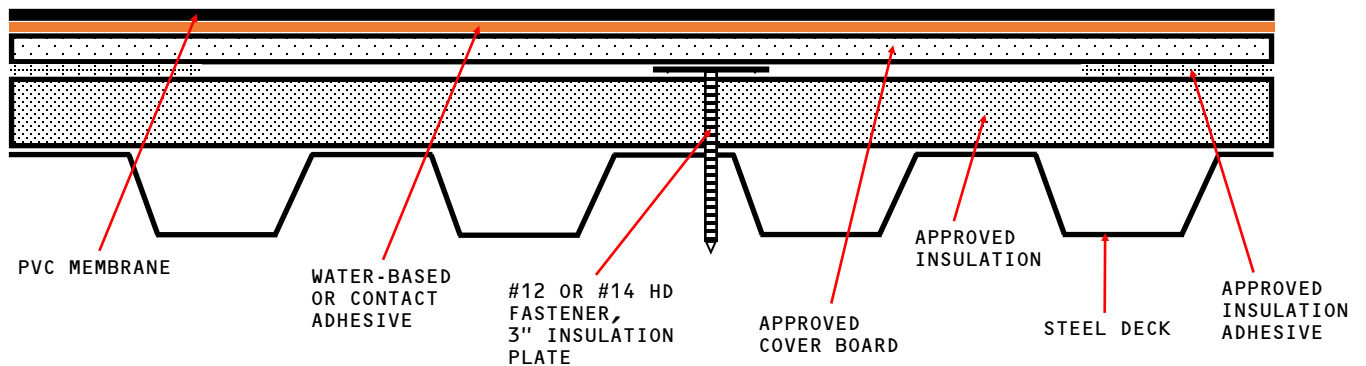

**APPROVED COVER BOARD:** DENS DECK, DENS DECK PRIME OR SECUROCK GLASS-MAT, MINIMUM 1/4" THICKNESS.

**APPROVED INSULATION:** UL CLASSIFIED POLYISOCYANURATE, EXPANDED POLYSTYRENE, EXTRUDED POLYSTYRENE INSULATION.

**NOTES:**

1. Attach Insulation with #12 or #14 HD Fasteners and 3" Steel Insulation Plate. Refer to Detail Drawings "Fastening Pattern Insulation/Coverboard GD-2 through GD-11".
2. Attach Coverboard with Approved Insulation Adhesive. Refer to Detail Drawings "Ribbon Insulation Adhesive pattern GD-17 and GD-18".
3. Class A Fire Rating with unlimited slope when utilizing Approved Coverboards.