




PHOENIX
PRODUCTS™

MF-CB-IN-C RoofNav Assembly

MECHANICALLY FASTENED MEMBRANE - COVER BOARD - INSULATION - CONCRETE DECK (NEW OR TEAR OFF)

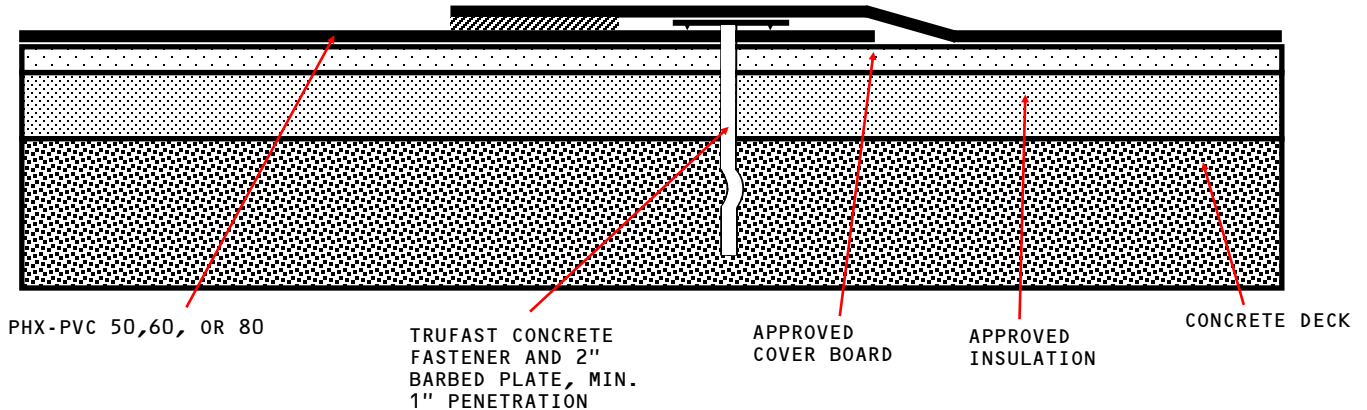

APPROVED COVER BOARD: DENS DECK, MINIMUM 1/4" THICKNESS.

APPROVED INSULATION: HUNTER PANELS, RMAX OR ATLAS UL CLASSIFIED INSULATION.

RoofNav Assembly Properties:

Assembly #: 433966-0-0	Slope: 2.0000
Roof System: Single-Ply System	Wind Uplift*: 225
Application: New Roof	Internal Fire: NC
Cover Securement: Attached	Exterior Fire: A
Deck Type: Structural Concrete	Hail: SH
Assembly limited to use with noncombustible walls only:	No

NOTES:

1. Attach Coverboard with Concrete Fasteners and 3" Steel Insulation Plate. Refer to Detail Drawing "Fastening Pattern Insulation/Coverboard MF-7". Minimum 1" penetration.
2. Class A Fire Rating with unlimited slope when utilizing Approved Coverboards.