




PHOENIX
PRODUCTS™

MF-CB-IN-C

Quick Spec

MECHANICALLY FASTENED MEMBRANE - COVER BOARD - INSULATION - CONCRETE DECK (NEW OR TEAR OFF)

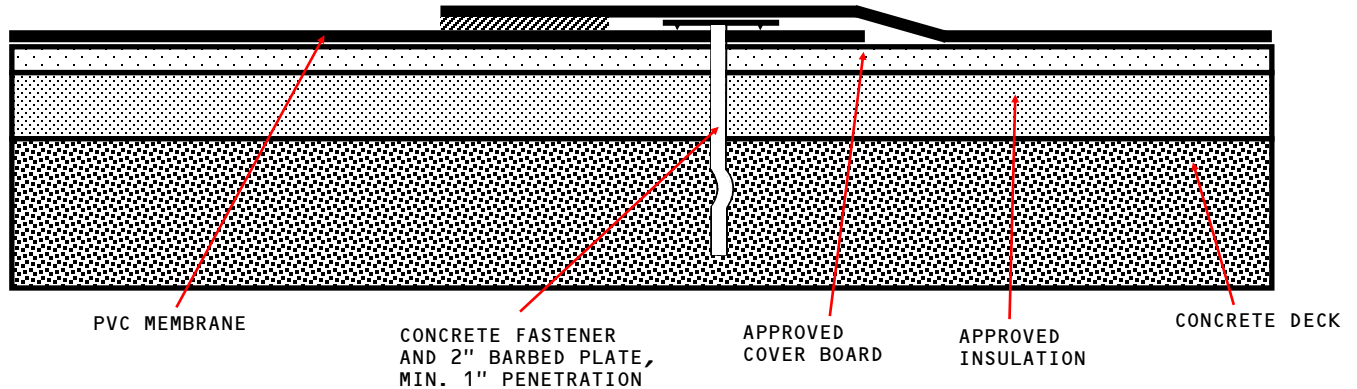

APPROVED COVER BOARD: DENS DECK, DENS DECK PRIME OR SECUROCK GLASS-MAT, MINIMUM 1/4" THICKNESS.

APPROVED INSULATION: UL CLASSIFIED POLYISOCYANURATE, EXPANDED POLYSTYRENE, EXTRUDED POLYSTYRENE INSULATION.

NOTES:

1. Attach Coverboard with Concrete Fasteners and 3" Steel Insulation Plate. Refer to Detail Drawing "Fastening Pattern Insulation/Coverboard MF-7". Minimum 1" penetration.
2. Class A Fire Rating with unlimited slope when utilizing Approved Coverboards.