




**PHOENIX**  
PRODUCTS™

**MF-CB-IN-EX-S**

**Quick Spec**

MECHANICALLY FASTENED MEMBRANE - COVER BOARD - INSULATION - EXISTING ROOF - STEEL DECK (RECOVER)

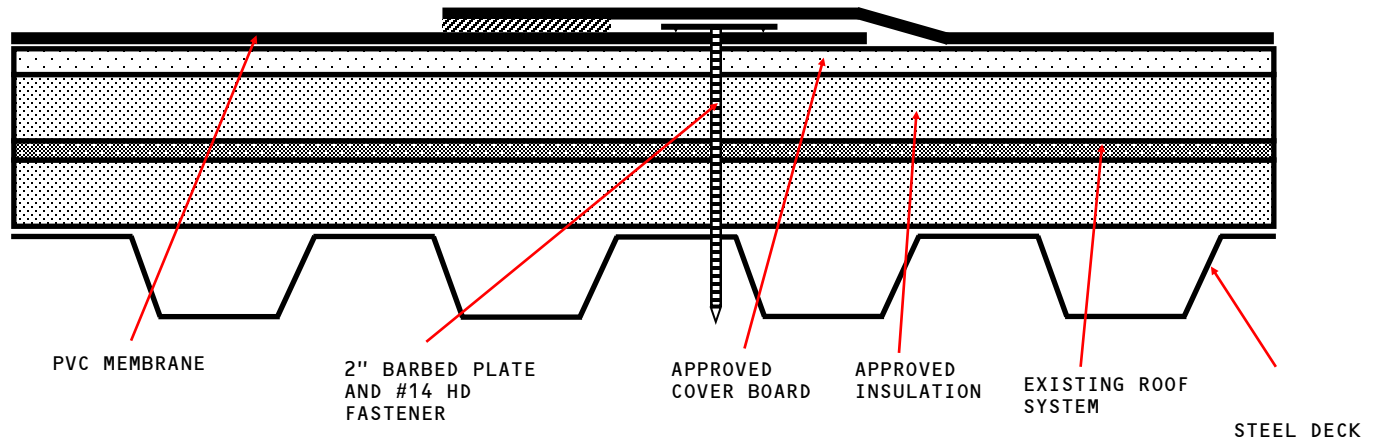

**APPROVED COVER BOARD:** DENS DECK, DENS DECK PRIME OR SECUROCK GLASS-MAT, MINIMUM 1/4" THICKNESS.

**APPROVED INSULATION:** UL CLASSIFIED POLYISOCYANURATE, EXPANDED POLYSTYRENE, EXTRUDED POLYSTYRENE INSULATION.

**NOTES:**

1. Attach Coverboard with #14 HD Fasteners and 3" Steel Insulation Plate. Refer to Detail Drawing "Fastening Pattern Insulation/Coverboard MF-7".
2. Existing Roof types may vary and not all are acceptable. Please contact the Phoenix Technical Department for approval on layover projects prior to installation.
3. Class A Fire Rating with unlimited slope when utilizing Approved Coverboards.