




PHOENIX
PRODUCTS™

MF-CB-FL-EX-MRpf RoofNav Assembly

MECHANICALLY FASTENER MEMBRANE - COVER BOARD - INSULATION - FLUTE FILLER - EXISTING METAL ROOF - PURLIN FASTENER (RECOVER)

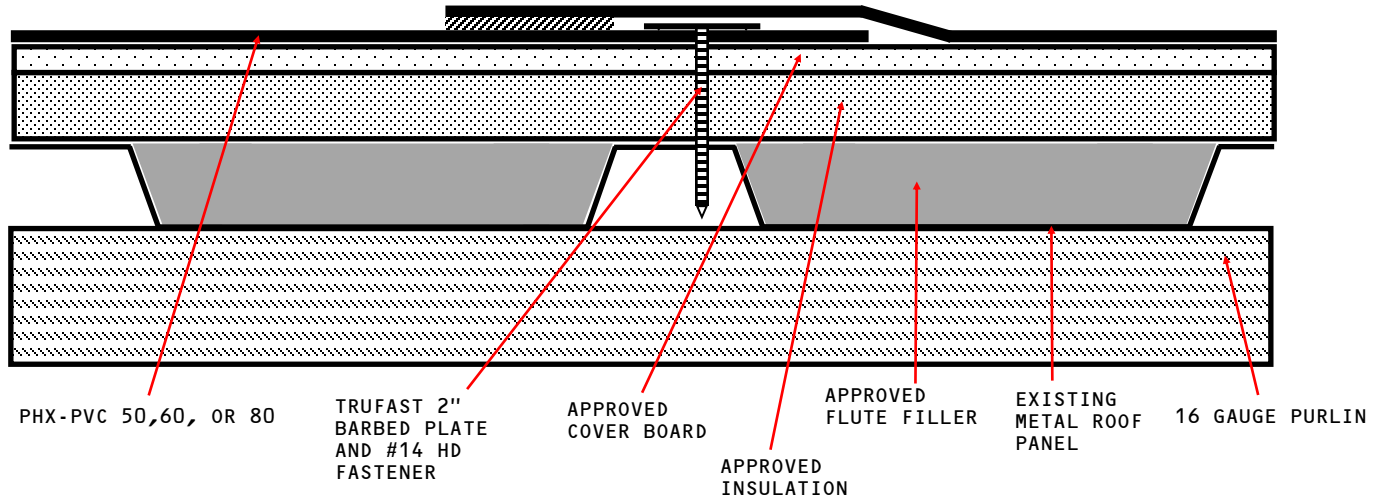

APPROVED COVER BOARD: DENS DECK, MINIMUM 1/4" THICKNESS.

APPROVED INSULATION: HUNTER PANELS, RMAX OR ATLAS UL CLASSIFIED INSULATION.

RoofNav Assembly Properties:

Assembly #: 491793-0-0	Slope: 2.0000
Roof System: Single-Ply System	Wind Uplift*: 225
Application: Recover	Internal Fire: NC
Cover Securement: Attached	Exterior Fire: A
Deck Type: Existing Roof	Hail: SH
Assembly limited to use with noncombustible walls only:	No

NOTES:

1. Attach Coverboard with #14 HD Fasteners and 3" Steel Insulation Plate. Refer to Detail Drawing "Fastening Pattern Insulation/Coverboard MF-7".
2. Existing Roof types may vary and not all are acceptable. Please contact the Phoenix Technical Department for approval on layover projects prior to installation.
3. Class A Fire Rating with unlimited slope when utilizing Approved Coverboards.