




**PHOENIX**  
PRODUCTS™

**MF-CB-IN-W**

**Quick Spec**

MECHANICALLY FASTENED MEMBRANE - COVER BOARD - INSULATION - WOOD DECK (NEW OR TEAR OFF)

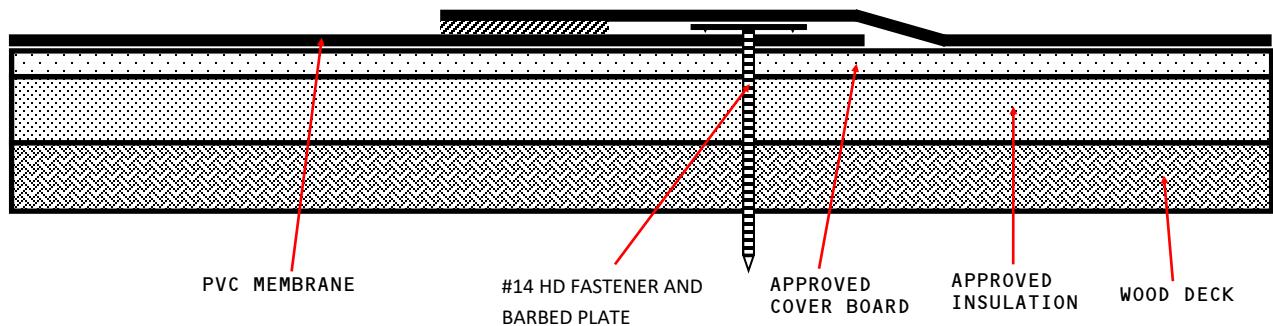

**APPROVED COVER BOARD:** DENS DECK, DENS DECK PRIME OR SECUROCK GLASS-MAT, MINIMUM 1/4" THICKNESS.

**APPROVED INSULATION:** UL CLASSIFIED POLYISOCYANURATE, EXPANDED POLYSTYRENE, EXTRUDED POLYSTYRENE INSULATION.

**NOTES:**

1. Attach Coverboard with #12 or #14 HD Fasteners and 3" Steel Insulation Plate. Refer to Detail Drawing "Fastening Pattern Insulation/Coverboard MF-7".
2. Class A Fire Rating with unlimited slope when utilizing Approved Coverboards.