




PHOENIX
PRODUCTS™

MF-IN-S RoofNav Assembly

MECHANICALLY FASTENED MEMBRANE - INSULATION - STEEL DECK (NEW OR TEAR OFF)

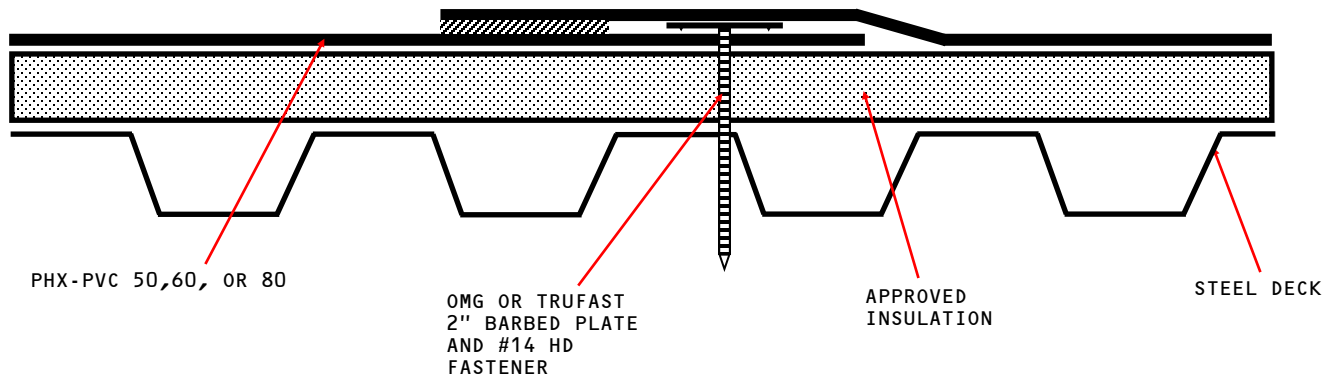

APPROVED INSULATION: HUNTER PANELS, RMAX OR ATLAS UL CLASSIFIED INSULATION.

RoofNav Assembly Properties:

Assembly #: 166626-0-0	Slope: 2.0000
Roof System: Single-Ply System	Wind Uplift*: 150
Application: New Roof	Internal Fire: 1
Cover Securement: Attached	Exterior Fire: A
Deck Type: Steel	Hail: SH
Assembly limited to use with noncombustible walls only:	No

NOTES:

1. Minimum thickness requirements may exist depending on insulation type. Please contact the Phoenix Products Technical Department for requirements if necessary.
2. Attach Insulation with #12 or #14 HD Fasteners and 3" Steel Insulation Plate. Refer to Detail Drawing "Fastening Pattern Insulation/Coverboard MF-7".
3. There maybe slope restrictions regarding Fire Ratings. Please contact the Phoenix Technical Department for Fire Rating restrictions if required.