




PHOENIX
PRODUCTS™

SBS-CB-IN-C **Quick Spec**

STONE BALLASTED MEMBRANE - COVERBOARD - INSULATION - CONCRETE DECK (NEW OR TEAR OFF)

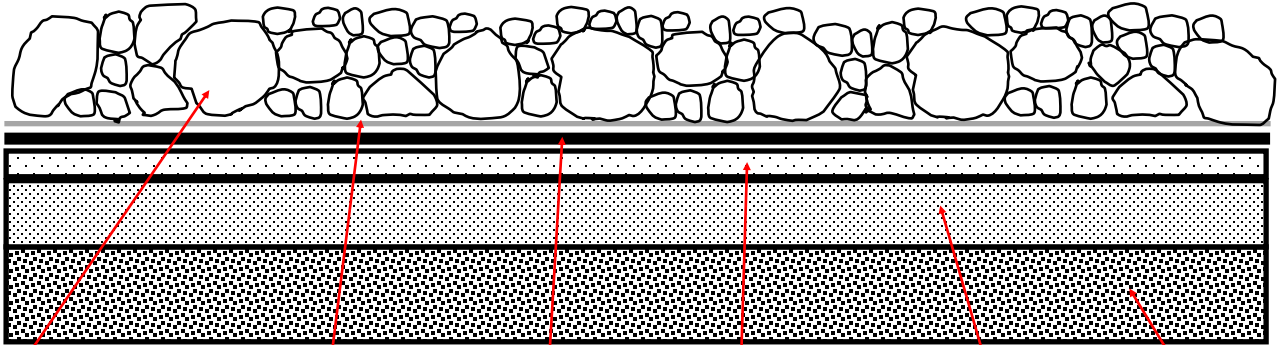

APPROVED
BALLASTED STONE
(SUPPLIED BY OTHERS)

APPROVED
SEPARATION SHEET

PVC MEMBRANE

APPROVED
COVER BOARD

APPROVED
INSULATION

CONCRETE DECK

APPROVED COVER BOARD: DENS DECK, DENS DECK PRIME OR SECUROCK GLASS-MAT, MINIMUM 1/4" THICKNESS.

APPROVED INSULATION: UL CLASSIFIED POLYISOCYANURATE, EXPANDED POLYSTYRENE, EXTRUDED POLYSTYRENE INSULATION.

APPROVED SEPARATION SHEET: 4 OZ OR 6 OZ GEOTEXTILE SEPARATION SHEET.

NOTES:

1. Loose-lay Coverboard and Insulation. Only install 60 or 80 mil with approved Ballasted Stone Assembly. FIELD: #4 stone @ 10 LBS. SQ./FT. PERIMETER/CORNER: #2 stone @ 13 LBS. SQ./FT.